

# CT-WirelessPTT MIL


The Wireless Remote for Smart Control Hubs, Radios and Phones



WHEN IT COUNTS

## CT-WirelessPTT MIL

## CT-WirelessPTT MIL

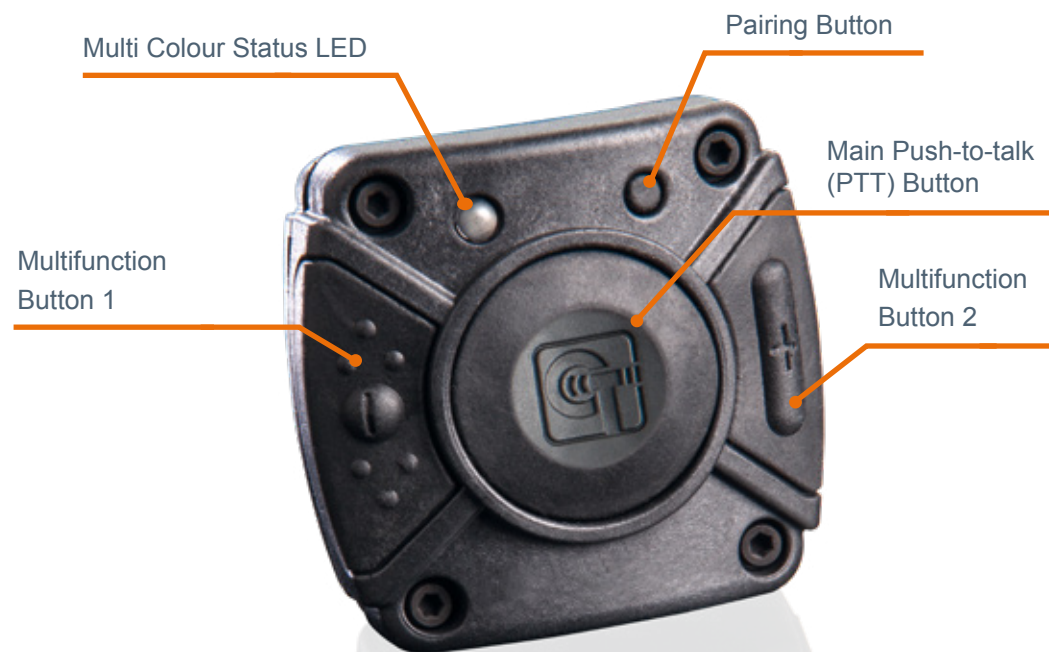

### CT-WirelessPTT MIL: The Ideal Companion for CeoTronics Smart Control Hubs.

The CT-WirelessPTT MIL is the ideal companion for the control hubs CT-MultiPTT 1C/3C. With the device the user is able to control the attached communication devices remotely in mission critical applications. The user can stay focused on his mission without distraction.

The device provides a large button for push-to-talk function and smaller multifunction buttons which can be used to trigger alternate functions, e.g. volume up/down, on the connected communication devices. The buttons provide clear tactile feedback.

The wireless remote control is not limited to products of CT-MultiPTT family. Its wireless control channel is based on Bluetooth® Low Energy (BLE).

This allows a seamless integration with mobile radios and smartphones that already provide a Bluetooth® Low Energy.

Multiple CT-WirelessPTT MIL can be used with one product to control different communication channels. Mounting options for one and two devices are available as strap, wristband and rail adapter.

The rugged remote control is designed for harsh environments and tested according to different methods of the MIL-STD 810G.

It comes with high protection against water and dust with IP ratings 66 (strong jet water) and 67 (immersion).

Due to the data protocols used in Bluetooth Low Energy, the CT-WirelessPTT MIL is also very easy to use with PTT over IP-Apps and applications.

For more information, please contact our sales representatives.

### Technical Data for CT-WirelessPTT BT

Description	Robust wireless remote control for mobile radios and phones
Buttons	Main Push-to-talk (PTT) button, 2 multifunction buttons, 1 pairing button
Status	Multicolor LED
Power Supply	Replaceable 3V CR2032 battery via battery door on the back
Operating Time	approx. 6 month
Mounting Options	Rail adapter, strap, wristband strap single unit, wristband dual units, vehicle plate adapter
Device Options	Concave PTT Button, Convex PTT Button (Combination of the two recommended for dual unit use)
Radio Technology	Bluetooth®
Radio Protocol	Bluetooth® Low Energy (BLE) 4.2
Radio Range	up to 5m
Radio Services	CT-Button State Service, BT SIG Battery Service
Dimensions	41 mm x 39 mm x 21 mm (W x L x H)
Weight	28 g (incl. battery)
Color	Black
Operating Temperature	-32° to +69°C
Storage Temperature	-40° to +80°C
IP Rating	IP66 IP67
Environmental Tests	Temperature, Vibration, Shock, Humidity (MIL-STD 810G) Salt Fog (EN 60068-2-52) Water (EN 60529)
Radio Approval	Europe: CE (RED 2014/53/EU)





**CeoTronics AG**

Audio · Video · Data Communication

Adam-Opel-Str. 6  
63322 Rödermark (Germany)

Tel.: +49 6074 8751-0  
Fax: +49 6074 8751-265  
E-Mail: [sales@ceotronics.com](mailto:sales@ceotronics.com)  
Web: [www.ceotronics.com](http://www.ceotronics.com)